


vivid.

easymount®

EM-1600 SHW WIDE FORMAT LAMINATING SYSTEM

Easymount® is designed to perform and built to last.

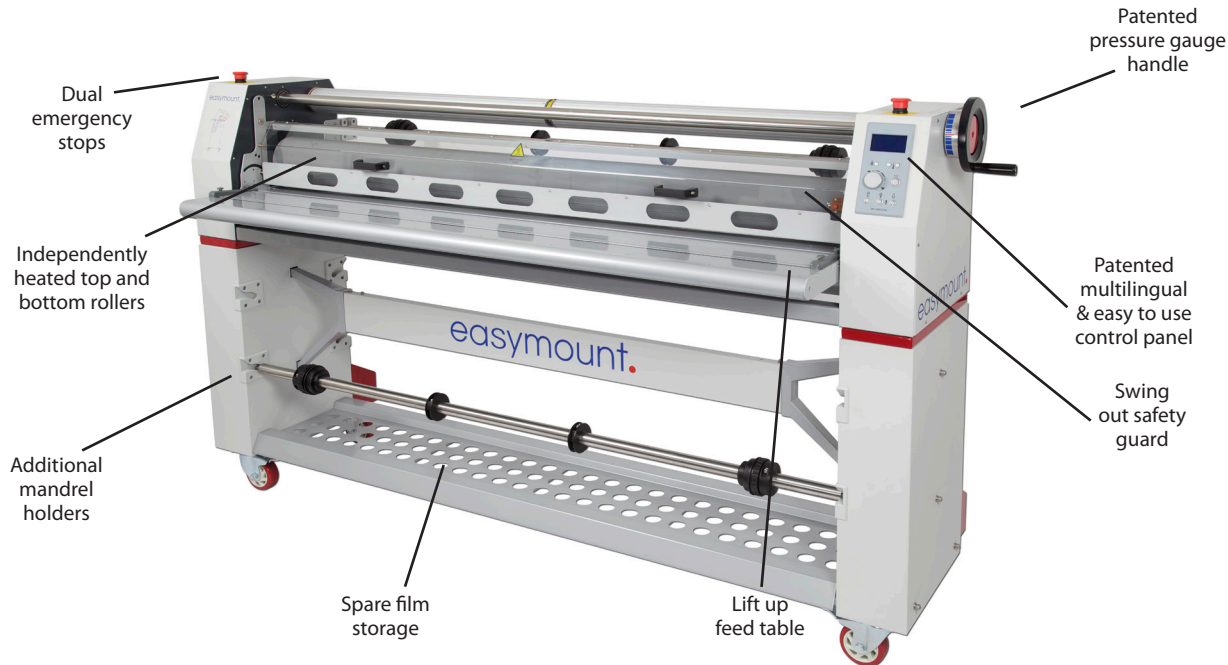

▲ EM-1600 SHW



Speed Control Reverse Mode

KEY FEATURES

- Laminate & mount in 1 system
- 6m/20ft a minute
- Variable speed control
- Foot pedal
- Reverse mode
- Multilingual control panel
- 25mm/1" mounting thickness

GREAT FOR USE IN

- Sign makers
- Print finishers

IDEAL WHEN LAMINATING

- Posters, graphics and signs
- Mounting prints to board
- Pop-up displays
- Applying vinyls, tapes and adhesive films
- Outdoor signage and many more...

Scan with your smartphone to watch the video



Design & Performance

The Easymount® laminators are designed to perform and built to last.

Their advanced features allow you to laminate and mount.

Designed in-house by Vivid, the Easymount® range gives your business extra capacity by allowing you to offer your customers a complete service that you previously had to outsource.

Specifications

EM-1600 SHW

Mechanical Speed (m/ft/min)	3.9m/13ft
Max. Width (mm/inches)	1600mm/63"
Mounting Thickness (mm/inches)	25mm/ 1"
Roller Diameter (mm/inches)	130mm/5"
Laminating Temperature (°C/°F)	0-130°C/32-266°F
Control Panel	Digital
Pressure Adjustment	Manual/Gauge
Film Core (mm/inches)	75mm/3"
Power Supply AC (V-Hz)	220/240-50-60
Power Consumption (W)	5000
Overall Dimensions (mm/inches)	1900x650x1255mm/78x26x49"
Gross Machine Weight (Kg/lbs)	205Kg/452lbs
Warranty	1 year

Features

- Independently heated top roller
- Solid heavy duty construction
- Release liner take-up
- Adjustable rollers up to 20mm/0.8"
- Handy reverse mechanism
- Foot pedal for controlled operation

 /vividlaminating

 @vividlaminating

 /vividlaminating

Vivid Laminating Technologies Ltd

Matrix House, Norman Court, Ivanhoe Business Park,
Ashby de la Zouch, Leicestershire LE65 2UZ England

+44 (0)845 1 30 40 50 sales@vivid-online.com

vivid-online.com

Vivid care about the environment and is an ISO 14001 registered company.